

Overhead Suspension Arm for Flat Screen OSA 8004150A

With the specially designed yokes and the adapters, one or two flat screens for medical or surgical applications in the medical field can be optimally positioned.

Due to their generous, excellent rotating and tilting angles, and in combination with the height-adjustable spring arms, the flat screens can be brought into any desired working viewing position.




Features & Benefits

- For flat screens up to 27 inches.
- Designed for loads up to 40 kg.
- 330-degree swivel angle of support arms with anti-twist safeguard due to interior supply lines.
- Height lock of tilting arm in two different positions.
- Monitor tilting angle of 30 degrees forward and 90 degrees backward.
- Monitor rotating angle up to 330°.
- With VESA interface 75x75 or 100x100.
- Sterile handle sleeve – optional.



Diagram

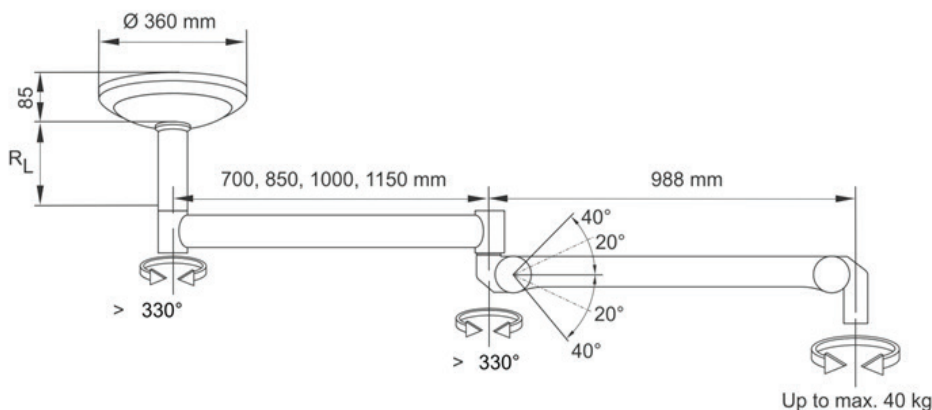

Optional Configuration

Overhead Suspension Arm for Two Flat Screens - OSA8004150

Double Overhead Suspension Arms System for Flat Screens or monitor - OSA8004150B

